



# AZOR® SERIES

## COMPACT MOVING HEADS

DESIGNED & ENGINEERED IN GERMANY

[cameolight.com](http://cameolight.com)

for lumen beings

POUR DE CONTOURER VOTRE ESSENTE. IMAGINE





TO CONNECT AND  
EMPOWER  
ALL LUMEN  
BEINGS  
AROUND THE WORLD







# HIGHLIGHT





## AZOR® SP2 IP

### COMPACT IP65 SPOT PROFILE MOVING HEAD

- IP65 Spot Profile Moving Head with 300 W LED and 11,000 lm luminous flux
- Zoom range: 3°– 50°
- CMY colour mixing and additional colour wheel with eight dichroic filters
- CMY colour mixing + and additional colour wheel with eight dichroic filters
- Rotating gobo wheel with seven indexable/rotatable, replaceable glass gobos + open
- Overlapping prisms (circular)
- Linear CTO for colour temperature adjustments
- Selectable PWM frequencies up to 25 kHz for flicker-free operation
- Quiet operation in three noise modes



CLAZORSP2IP









## AZOR® SP2

### COMPACT SPOT PROFILE MOVING HEAD

- 300 W LED with 13,000 lm luminous flux
- Motorized framing blades on four layers (+/- 60° rotable)
- Zoom range: 3°– 50°
- CMY colour mixing and additional colour wheel with 8 dichroic colour filters
- Rotating gobo wheel with seven indexable/rotatable, exchangeable glass gobos + open
- Overlapping prisms (circular)
- Linear CTO for colour temperature modulation in lighting setups
- Selectable PWM frequencies up to 25 kHz for flicker-free operation
- Silent operation in three noise-modes



CLAZORSP2








# AZOR® S2

## COMPACT SPOT MOVING HEAD

- Compact spot moving head
- 300 W LED illuminant with 13,000 lm luminous flux
- Zoom range: 5°– 50°
- CMY colour mixing
- Additional colour wheel with eight dichroic colour filters
- Rotating gobo wheel with eight indexable/rotatable, exchangeable glass gobos + open
- Static gobo wheel with 11 gobos + open
- Selectable PWM frequencies up to 25 kHz for flicker-free operation
- Neutrik True1-compatible inputs/outputs
- OLED display with four buttons

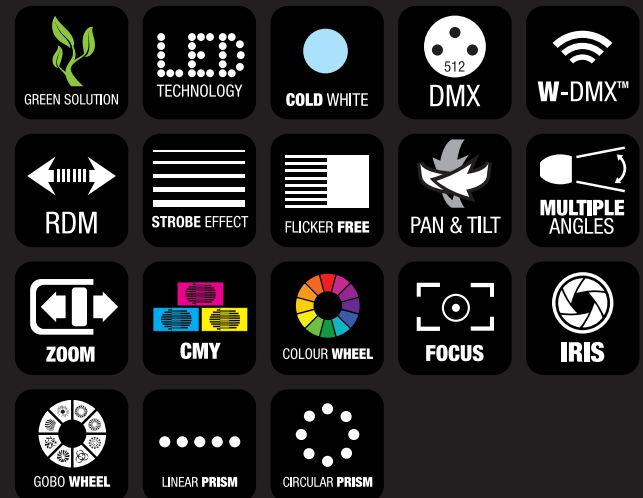

CLAZORS2








# AZOR® W2

## COMPACT WASH MOVING HEAD

- 7 x 40 W RGBL LED with 3,600 lm luminous flux
- Zoom range: 4°– 50°
- Single pixel control of all seven LEDs
- Eclipse Burst Effect\* for strobe and pixel effects
- Selectable PWM frequencies
- iDMX stick input for wireless DMX connection
- OLED display with four buttons

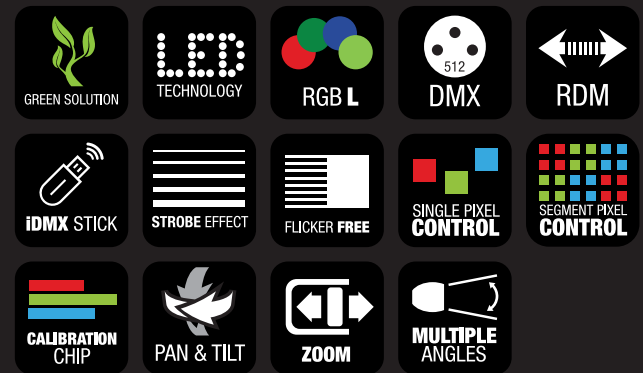

CLAZORW2

















The information contained in this publication, including numerical data, has been prepared as a general guide to the products, but intending buyers and users must satisfy themselves as to the suitability and the safety of the products for their particular purposes and duties. No responsibility is assumed for any errors herein. The company reserves the right to alter the designs and material specifications of products shown in this publication without notice.