



The finest built Direct View LED Wall Systems

Taylorleds is an innovative, integrity minded joint-venture focused on providing State of the Art LED products. Absen owns 80% of Taylorleds and manufactures most of Taylorleds LED Display products while Design, R&D and QC are handled by Taylorleds. Absen is a public-listed Chinese LED Display manufacturer.


For more than 15 years the staff at ATS-Professional has designed and built some of the most iconic indoor LED systems throughout the world with Pixel ranges from .83mm to 4mm in all sorts of sizes and shapes.

ATS-Professional is a direct designer and importer of OEM LED Panel designs. Our LED products are manufactured for ATS by some of the largest LED factories in the world.

We choose OEM factories based on the requirements of the project and each factory's unique capabilities to provide the finest solution for our customers based on our Engineering Build Requirements and Design.


With decades of experience dealing in OEM manufacturing and our Un-matched internal Design and Engineering, ATS-Professional introduces our newest and most advanced line of indoor LED systems.

Every facet of the Design has been meticulously thought out. Mechanical Design, Visual Electronics, Installation, Reliability, Service and Support, Multiple Resolutions and Media Playback Systems to fit any budget.

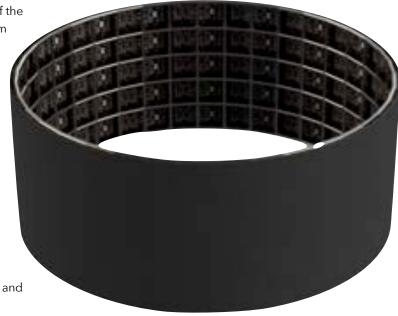






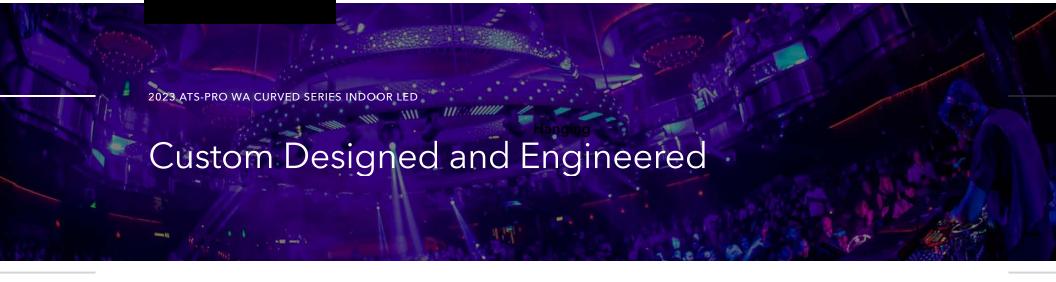


Flexible Installation

Installation in front/rear according to site conditions; supports hanging, wall- mounting and stacking installation.

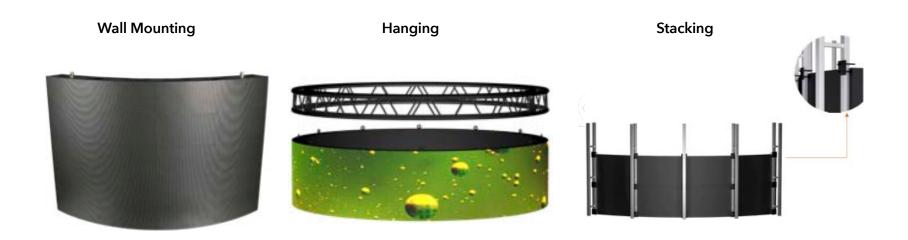





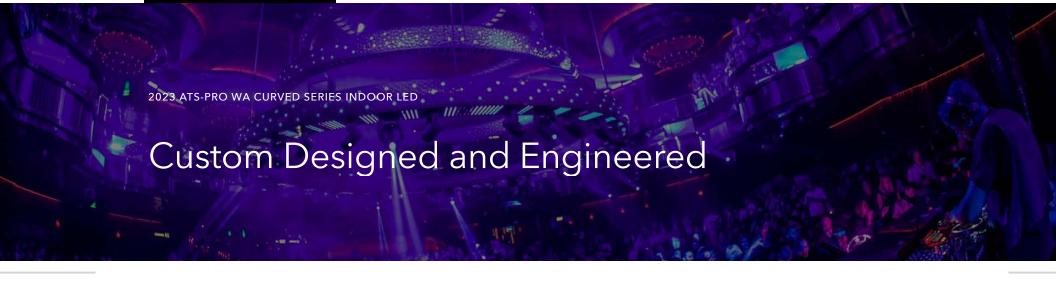

Supports Customization of Different Shapes

Various customizable shapes (concave/convex/wave/cylinder) according to customer needs to help customers showcase their creativity.







Specifications

2023 ATS-PRO WA SERIES CURVED INDOOR LED



Specifications	WA1.8	WA2	WA2.5	WA3
LED Type	Black SMD1515	Black SMD1515	Black SMD1515	Black SMD1515
Pixel Pitch (mm)	1.875	2	2.5	3
Panel Dimensions (W*H*D)/(mm)	960*720*70 960*600*70 960*480*720 720*720*70 720*600*70 720*480*70	960*720*70 960*600*70 960*480*720 720*720*70 720*600*70 720*480*70	960*720*70 960*600*70 960*480*720 720*720*70 720*600*70 720*480*70	960*720*70 960*600*70 960*480*720 720*720*70 720*600*70 720*480*70
Module Dimensions (W*H)/(mm)	240*120	240*120	240*120	240*120
Cabinet Material	Steel	Steel	Steel	Steel
Brightness (nit)	800	800	800	800
Refresh Rate (Hz)	3840	3840	3840	3840
Gray scale (bit)	14	14	14	14
Viewing Angle (H/V) (°)	160/160	140/140	140/140	140/140
AC Operating Voltage (V)	100~240	100~240	100~240	100~240
Storage Temperature (°C)	-40~+60	- 40~ + 60	- 40~ + 60	-40~+60
Operating Temperature (°C)	- 10~ + 40	− 10~ + 40	- 10~ + 40	-10~+40
IP Rating (Front/Rear)	IP40/IP21	IP40/IP21	IP40/IP21	IP40/IP21
LED Lifetime (H)	100000	100000	100000	100000

Specifications subject to change. Please contact ATS-Pro for updated Specifications

